



City of Morden  
Planning & Engineering  
100-195 Stephen Street  
Morden, MB R6M 1V3  
[tel] 204-822-4434  
[fax] 204-822-6494

## Addendum 1

### Tender 1311: Victoria St Pathway Reconstruction. Concrete Curb&Gutter

---

The City of Morden wishes to make the following clarifications and amendments to the contract:

1. To Section 4, *Tender Price*:
  - *Item 2* is now only for hauling waste material to City Compost site (Willcocks Road) and paid based on truck volume. If you are directed by the Engineer to leave certain amount of material on site, you can dump it in the field at the east end of Victoria Street. Please exclude the cost of saw-cutting the existing highway pavement from the *Item 2* price. Include the price for saw-cutting in *Item 1*.
  - *Item 3 (new item)* is for the concrete ramp at the intersection of the pathway at 1st Street (2.4x2.0x0.75m). Cost includes shaping of existing, compacted base and installation of the concrete ramp on top of it.
2. Please notice that Curb&Gutter Detail has changed to City Standard (See Page 2). Also, note that distance between face of the gutter and your saw-cut is 450mm.

Please replace Section 4.2 and 4.3 in the tender package with the attached.


**The submittal deadline for the Tender remains the same: 11a.m. on Tuesday, September 2, 2014.**

If you have any question or concerns, please contact as indicated on the Project Reference Sheet.

Sincerely,

Tatiana Sinchenko  
City of Morden  
Engineering Assistant

CURB DETAIL  
SCALE: NTS

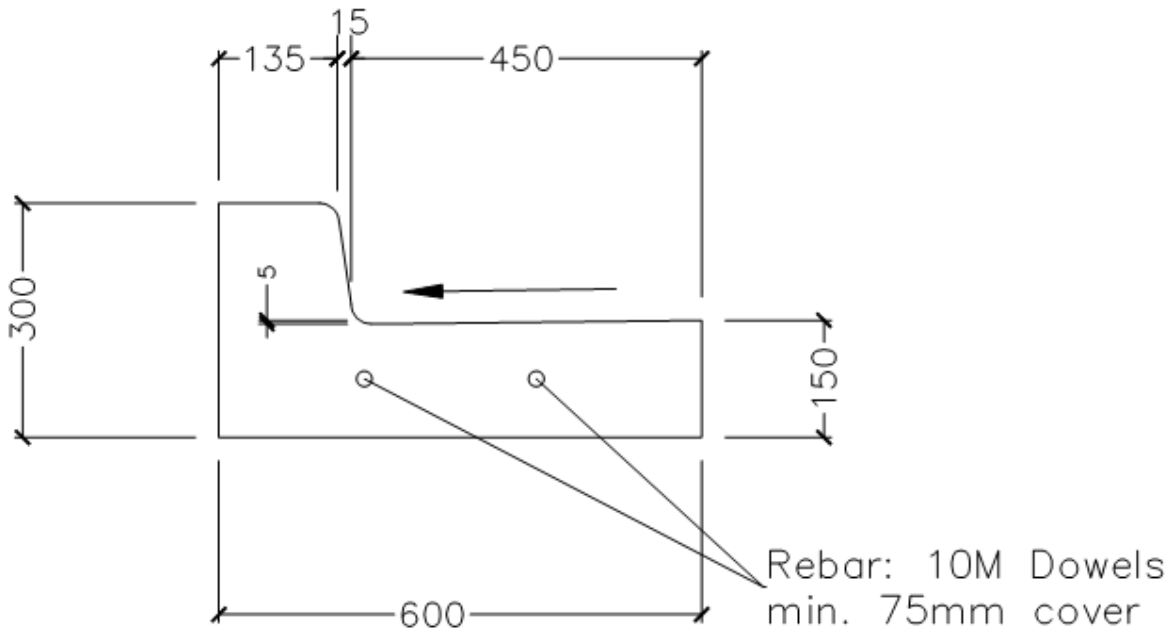

## 4.1 Quantities and Prices

---

- A. The Tenderer hereby submits unit prices as required by the specifications and agrees that the City will use these as the basis for payment of work. The quoted prices shall remain in force until the date of contract completion.
- B. The Tenderer agrees that the City will use the unit prices agreed upon in the Tender Form to determine the value of any works added to, or deleted from the Contract.
- C. The Tenderer agrees that the Tender Price, including the unit prices, includes all necessary costs to complete the works unless otherwise indicated elsewhere in the Tender Documents.
- D. The Tenderer agrees that the City, or its appointed representative, will measure the progress of the work.
- E. The Total Tender Amount should agree with the sum of the individual unit prices plus GST.

## 4.2 Unit Price Item Explanations (Revised as per Addendum 1)

---

- A. *Item 1* includes:
  - Temporary access construction and maintenance;
  - Saw-cutting of existing edge of asphalt as marked on site by the Engineer;
  - Preparing the site for installation of A-Base;
  - The supply of geotextile, A-Base, concrete and all equipment, labour, and materials required to complete the works;
  - Placement of A-Base, pouring concrete, cylinder testing;
  - Backfilling behind curbs;
  - Placing and preparing A-Base between gutter and edge of asphalt;
  - Placing and preparing driveways at swale;
  - Traffic control per specifications.
- B. *Item 2* is for hauling waste material to City Compost site (Willcocks Road) and paid based on truck volume.
- C. *Item 3* is for the concrete ramp at the intersection of the pathway at 1<sup>st</sup> Street.

# Section 4

# Tender Price

## 4.3 Unit Prices (Revised as per Addendum 1)

Item Description	Qty.	Unit	Unit Price (\$)	Total Price (\$)
1. <i>Install barrier curb and gutter</i>	387	LM	\$	\$
2. <i>Remove existing asphalt, haul to Compost Site</i>	214	YD3	\$	\$
3. <i>Supply and install the concrete ramp</i>	0.468	YD3	\$	\$
<b>Note: 'LM' – Lineal Meters; 'LS' – Lump Sum; 'EA' – Each</b>				
			<b>Total Price</b>	<b>\$</b>
			<b>GST (5%)</b>	<b>\$</b>
			<b>Total Tender Price</b>	<b>\$</b>

**Total Tender Price (printed):**

---